

# MANUFACTURED EZIFIT

## *Product Spec V2*

M028



**InfinitiStone®**  
Your Natural Choice in Stone Cladding

## About this Product

Ezi-Fit Stacked Stone is our most popular range, loved by builders and DIYs alike. Builders love it because it allows them to enhance the look of their projects quickly and economically.

DIYs love it because they can install it themselves with little technical knowledge and thus save on installer fees. As the name suggests this range is very easy to install.

Pieces come in panel/tile form and once adhered to a surface there is no need for grouting ie dry stacked.

Prefabricated external corners are available.

## Our Colour Selection



*Colour* – off-white base with splashes of tan and grey feature tones




*Colour* – dark grey base with splashes of tan, red browns and dark grey feature tones



*Colour* – beige base with splashes of tan and grey feature tones



*Colour* – grey base with splashes of tan and dark grey feature tones



*Add Texture quickly  
and cost effectively –  
that is why our Ezi-Fit  
ranges are popular  
amongst Builders and  
DIYers*

M027-075

\*Using this guide means you accept our Terms & Conditions as shown on our Website

## Dimensions, Sizing & Packaging

### Flats:

100mmH x 500mmL, 300mmL, 200mmL  
(comes random in pre-packed boxes)

### Corners:

100mmH x 180mm Long Leg & 90mm Short Leg (external dimensions), internally 150mm Long and 50mm Short Legs.

### Thickness & Weight:

20-30mm, 35kg/m<sup>2</sup> for 021 & 025 and  
20-40mm, 40kg/m<sup>2</sup> for 027-075 & 028.

## Packaging

Available in 0.5m<sup>2</sup>/box Flats and 1.2lm/box Corners.



*Pre-fabricated Corners available, ensuring most natural edge detailing – no unsightly mitre join lines and up to half your installation time saved!*



### ***Quick Installation Tip***

External Corners should be installed first, starting from bottom and alternating long and short Legs/Returns. Flats can be installed to fill in areas with joins to be staggered. Select stones from several different boxes to ensure proper blend of colour variation. Installer should check levelness after every few rows. See detailed Installation Guide available separately.




### Cutting

Our manufactured veneers can be easily cut or trimmed using an electric tile cutter or hand held grinders with a diamond or masonry blade. Trimming can also be done by using a hatchet or wide-mouth nipper.

**SILICA DUST HAZARD** - When natural stone or rock and other silica containing products are cut, crushed or sanded, dust is released. The very fine portion of the dust that is generated is known as respirable crystalline silica or silica dust. **Ensure to use necessary Personal Protective Equipment when cutting or shaping Natural or manufactured Stone Products.**

*AS/NZS3837-1998 classified as 'non-combustible' – suit both exterior and interior projects – perfect for fireplace surrounds.*

*As much as 30% lighter in weight than natural quarried stone therefore can be veneered onto most wall surfaces*

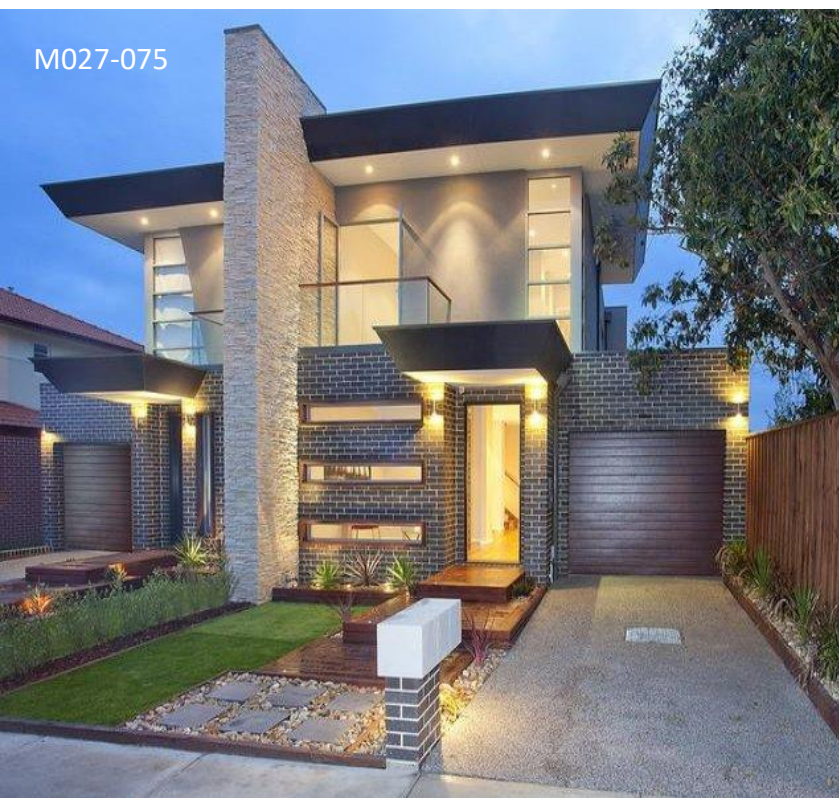

## ***Joints***

Our Ezi-Fits are best installed via dry-stacking, butt joined method ie. no requirement to grout.

## ***Sealers***

This product is naturally porous therefore we highly recommend applying a masonry sealer on completion.

You can choose a penetrating, breathable sealer to keep its original tone or a satin sealer for a sheen look.

### **Important Note**

While reasonable efforts have been made to ensure the contents of this publication are factually correct, InfinitiStone or DIYHQ does not accept responsibility for the accuracy or completeness of the contents and shall not be liable for any loss or damage that may occur directly through the use of, or reliance on, the contents of this publication.



For more information visit  
[www.infinitistone.com.au](http://www.infinitistone.com.au)  
 or  
 Call 1300 238 288