

MOKI-X EZIFIT




InfinitiStone®
Your Natural Choice in Stone Cladding

PRODUCT

Our **MOKI-X EZIFIT** is a natural Quartz Limestone, formed by hand splitting to front and side faces, sawn cut at back, then created from factory prepared loose pieces adhered onto heavy duty plastic mesh backing, resulting in interlocking X-panels. This ensures easy, cost effective, dry fit stone wall installation - NO MORE long horizontal join lines!

This grey based limestone selection readily adapts to various architectural designs due to its pleasing neutral colour tones. Its' durability is another advantage that have all worked together to maintain the stone's timeless beauty. stone feature designs.

Design

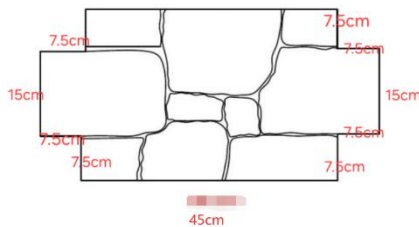

*Colour varies from piece to piece
^Allow +/- 5-10mm design tolerance

Dimension

Available in 600mm Wide x 300mm High overall, with 75mm x 75mm cut out each corner end to form X-shaped panels. Thickness 15-35mm varying depth. ^ Allow +/- 5-10mm design tolerance.

Corners

Available separately or create corners by finger joining site in-situ with ease.



Weight

Approx. 65-68kg/m²

Packaging

Sold in 6.93m² Crates flats, 44 pieces/Crate.

Colour

Varying Beige tones with splashes of browns and subtle splashes of cloudy dark grey tones. Colours vary from piece to piece.

INSTALLATION

Handy Tips

- All substrates must be free from dust and release agents prior to installation
- We recommend cladding onto structurally sound substrates. Mechanical fix shelving brackets or meshing for additional structural support where applicable.
- If using pre-mix adhesives such as Mapei Keraflex Maxi S1 or Mapei Kerabond Plus with Isolastic or similar, ensure to wipe off excess from face of stone immediately with a wet sponge
- Starting from bottom, work your way up the project wall, row by row, staggering your joints.
- Check levelness every few rows
- View our Installation Guide for full installation details.

Cutting: Use a quality wet tile saw or grinder with a diamond blade or similar. If you do not have one, you can hire one from your local building equipment hire store.

Joint Finish: This range can be installed via dry fit, stacked method. NO MORE long horizontal join lines.



Sealing: Natural stone are generally porous by nature and therefore sealing with appropriate sealers are recommended. This process limit discolouration and protects from serious common damage from liquids, including: salt attack, freeze-thaw damage, spalling and picture framing and inhibits the growth of mosses and moulds in the pores of the stone.

Important Note

While reasonable efforts have been made to ensure the contents of this publication are factually correct, InfinitiStone, DIYHQ or DIY International does not accept responsibility for the accuracy or completeness of the contents and shall not be liable for any loss or damage that may occur directly through the use of, or reliance on, the contents of this publication.

SILICA DUST HAZARD - When natural stone or rock and other silica containing products are cut, crushed or sanded, dust is released. The very fine portion of the dust that is generated is known as respirable crystalline silica or silica dust. **Ensure to use necessary Personal Protective Equipment when cutting or shaping Natural or manufactured Stone Products.**